

*Supplying spacer solutions
to the electrical and communications industry*



- TIME SAVING INSTALL
- EASY TO BUILD TO ANY CONFIGURATION
- FREE DIMENSIONED CAD DESIGN & QUOTE

**NOW AVAILABLE
PRE-ASSEMBLED**

www.conduitspacers.com.au

The Spacer Company is a National Code Compliant Company

Products:



CONDUIT SPACER

Available to suit 100, 125, 150 and 200mm Conduit

AVAILABLE PRE-ASSEMBLED

The Conduit Spacer is manufactured in Australia using 100% recycled materials.

Patent 2008255271



SPACER BLOCK

Available in 20, 25 and 50mm sizes to adjust STANDARD Spacing between CONDUIT SPACERS

The Spacer Blocks are manufactured in Australia using 100% recycled materials.



BAFFLE SPACER

Customise a spacer solution with our Baffle Spacer.

Each Baffle Spacer is manufactured in Australia from 15mm thick PVC or 12mm SUPERTOUGH Recycled Polyethylene. By using our CNC equipment to cut each spacer we ensure precise spacing is maintained.



BORE SPACER

PVC Bore Spacer for Conduit in Casing Applications

Bore Spacers are manufactured in Australia in 15mm thick PVC or our 100% Recycled PE board. CAD designs are fully customized to each project.



HOLD DOWN SPACERS

Accessories to help reduce conduit banks floating


The Hold Down Spacers are manufactured in Australia using 100% recycled materials.

- Multiple layers of varying conduit sizes can be combined in an easy clip construction. No special tools required.
- Ensures correct spacing is maintained
- Trefoil construction can also be designed using the standard Conduit Spacers.



2 USES:

- Expand the 50mm standard separation to whatever additional spacing may be required.
- Attaching the SB25 to the sides of the structure provides anchor points for 12mm bar to be inserted to pin the conduits to the base of the trench.

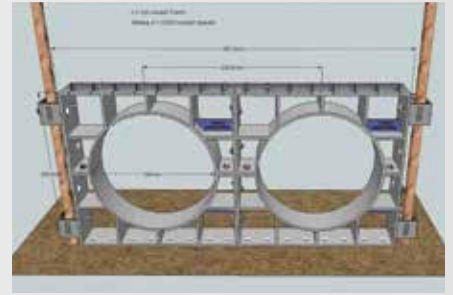

A 'made to measure' solution to suit all the other non-standard applications. Provide us with basic requirements and we will provide dimensioned CAD drawings for approval before cutting.





Customised solutions for Bore Spacing applications. These can be manufactured with or without wheels ideal for Casing applications. From your basic information we will provide a dimensioned drawing for your sign off and subsequent manufacture.



'CHD' Conduit Hold Down is used for the singular conduit and Trefoil configuration. 'SHD Spacer Hold Down is used for the Bank Configuration of Multiple conduits. Each Hold Down spacer is designed to allow connection to a 20-39mm rod for support.



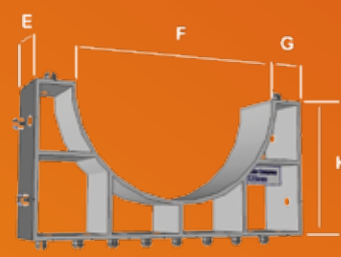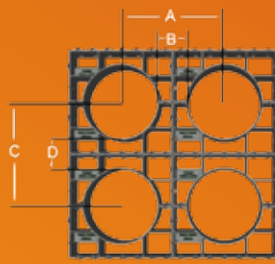

	A	B	C	D	E	F	G	H
ALL DIMENSIONS IN MM								
100MM CONDUIT SPACER	173	50	173	50	45	123	25	87
125MM CONDUIT SPACER	200	50	200	50	45	150	25	100
150MM CONDUIT SPACER	225	60	214	50	45	165	30	107
200MM CONDUIT SPACER	300	50	300	50	45	250	25	150

VISIT WWW.CONDUITSPACERS.COM.AU AND TRY THE SPACER CALCULATOR

NAME	CODE	IMAGE	QTY PER BAG	QTY PER PALLET	WEIGHT PER BAG (KG)	WEIGHT PER PALLET (KG)
100MM CONDUIT SPACER	CS100		40	2,160	5	300
125MM CONDUIT SPACER	CS125		34	1,836	4	260
150MM CONDUIT SPACER	CS150		30	1,440	6	260
200MM CONDUIT SPACER	CS200		20	1080	4.5	260
CONDUIT HOLD DOWN	CHD		80	N/A	6	N/A
SPACER HOLD DOWN	SHD		80	N/A	6	N/A
SPACER BLOCK 20MM	SB20		600	43,200	6	N/A
SPACER BLOCK 25MM	SB25		600	36,000	6.5	N/A
SPACER BLOCK 50MM	SB50		400	19,200	8	400